



SB Connectivity Regisafe

This manual is for connecting the archival software Regisafe. This guide is tested with Regisafe Version 4.6

Written By: Rene Weber

REGISAFE

INTRODUCTION

This manual is for connecting the archival software Regisafe.

This guide is tested with Regisafe Version 4.6 and the Silent Brick WORM Archive Version 2.10


Step 1 — General Information

⚠ Requirements Compliance Option is necessary to enable various WORM volume types.

i Installation and Connectors Installation and electrical connection as well as network connection are to be done as described in the manual Installation

i Network Adjustments The network settings are to be adjusted as described in the manual Installation

Step 2 — User settings

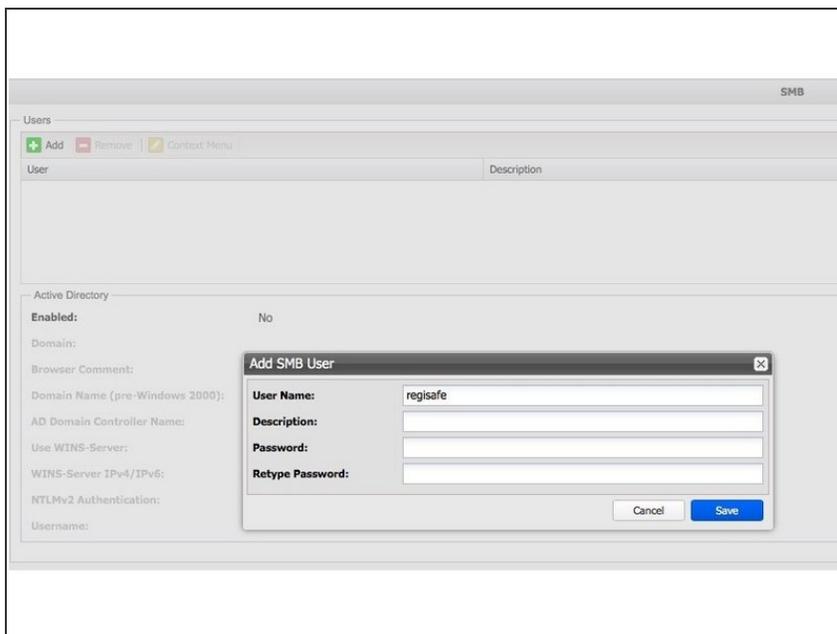

- Connect to the Silent Brick Web Interface
- Switch to Settings -> SMB
- Create a user 'regisafe' with a proper password

Step 3 — Volume Settings

Add Sub Volume

Name: Regisafe

Description:

Volume type: WORM with retention (RWRO triggered)

Years: 6 Days: 0 Hours: 0 Minutes: 0

List

File extension: safe

File format: xml

Cancel Add

- Create an archive including WORM and Stage Brick
- Create a sub-volume of type WORM with Retention (RWRO triggered).
- The retention period in years and days must be adopted to the value necessary for the data content being archived
- ✓ Listing of safe files is not needed
- ✓ Check the box 'Do not archive 0-byte files'

Step 4 — Share Settings

Add SMB Share

Please enter name, path, configuration and permissions for this share.

Share Path: /

Share Name: TestArchive-Regisafe

Read Only Browseable

Case Sensitive

Group/User Permissions:

Public

+ Add Permission - Remove Permissions

Name	Type
regisafe	User

Cancel Save

- Case Sensitive might be switched on, as long as no problems are detected. In case errors occur

during data retrieval this switch should be switched off.

- Make sure to search for the service user you entered before and add it to the list of users granted access (**regisafe** in this sample configuration)

Step 5 — Connect regisafe

- For the use of a Silent Brick as archive medium it is absolutely necessary to set **NAS Worm** as an option
- The Worm medium must be specified as file target in the Server.ini and Client.ini
- The name of the medium can be chosen freely, here FastLTASilentBrick
- Make sure to enable 'Versionsprüfung'